


BUCKAU-WOLF BATCH CENTRIFUGALS

Buckau-Wolf batch-type centrifugals have an unmistakable, slim design of the centrifugal basket. As a consequence a very high separation factor of up to 1,500 (dextrose) and 1,250 (sugar) is achieved. The separation efficiency is hence maximised and a discoloration of 98 % is the result. The residual moisture in the case of white sugar massecuites is 0.5 %. The optimized control system permits reduced cycle times and thus the highest production output for first-class product and process quality.

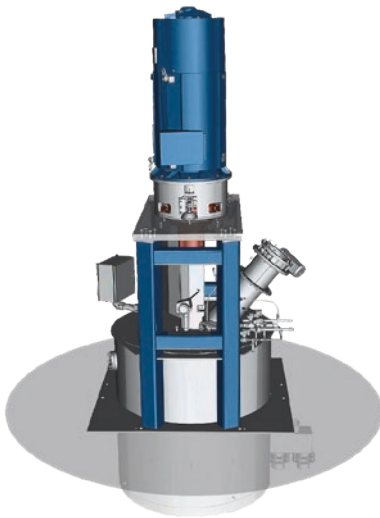

Maximum production output

- Monitoring of the filling quantities by means of the control system developed in-house, resulting in precise, exactly reproducible massecuite layer thicknesses in each cycle
- Optimum utilization of the basket capacity in every batch with the help of the Buckau-Wolf control system
- Maximum production output by means of slim basket design in combination with the high centrifugal force
- Minimum use of wash water, hence minimization of sugar loss resulting from dissolving in the basket
- Integration of the control system into process control systems possible
- Improved, cross-system communications technology including the intelligent interlocking of connected centrifugals
- In the event of a malfunction, quick remedial measures for the analysis and locating of the fault and avoidance of downtimes due to a modern diagnostic system

Ease of operation

- Operation particularly easy and reliable due to a high degree of automation and a user-friendly panel surface
- Language-independent, self-explanatory graphic presentation on the control panel



- Additional functions for service support

Energy-saving

Very low energy consumption of less than 1 kWh/batch in white sugar production due to the special design and the particular drive concept

High operational reliability due to Level D control system

- Latest EU Machinery Directive as the basis
- 'Safe low speed' function safeguards safe and reliable shutdown of the machine without loss of the batch and unnecessary delays due to cleaning work in the event of a malfunction
- Integration of a monitoring system for continuous analysis and diagnosis of all rotating parts as well as a function for the automatic transmission of status and malfunction messages by SMS or e-mail as an option



Batch-type centrifugals for beet sugar and cane sugar separation		BW 1300S	BW 1500S	BW 1750S	BW 2000S	BW 2250S
Basket capacity	dm ³ /batch	762	965	1100	1350	1410
Basket diameter	mm	1270	1350	1430	1625	1625
Speed of rotation	rpm	1245/1330	1210/1290	1175/1250	1100/1175	1100/n/a
Separation factor, Z		1100/1250				
Refined sugar						
Nom. massecuite quantity*	t/h	33	42	47	58	61
Batches per hour	batch/h	27				
A-Product and raw sugar						
Nom. massecuite quantity*	t/h	30	38	44	54	56
Batches per hour	batch/h	25				
B-Product						
Nom. massecuite quantity*	t/h	24	31	35	43	45
Batches per hour	batch/h	22				

*based on 1100g and depending on the massecuite quality

Our market is the world

Buckau Wolf GmbH is a globally active, owner-managed company with a long tradition specializing in special machinery. We are experts in industrial mixing and separation processes for a variety of applications. We offer our customers the reliability of a supplier that has been established for decades, modern control technology, competent staff and flexible service.

Whether with spare parts, maintenance, inspection, security conversions or rental machines - **qualified, reliable and flexible.**

BUCKAU-WOLF GMBH

Nordstrasse 41

41515 Grevenbroich

Germany

Phone: +49 2181 602-400

Fax: +49 2181 602-342

E-Mail: supraton@buckau-wolf.com

www.buckau-wolf.com

